



**Burner Systems:**

**G52-18/20  
G52-24/30**

**For use with  
natural gas only**



**DESIGN CERTIFIED  
to  
Manually Lighted, Natural Gas  
Vented Decorative Appliance  
ANSI Z21.84-2012**

**FOR INSTALLATION IN  
SOLID-FUEL BURNING  
FIREPLACES\***

**G52 VENTED BURNER SYSTEMS (MANUALLY LIGHTED)**

**WARNING**

If the information in this manual is not followed exactly, a fire or explosion may result, causing property damage, personal injury, or loss of life.

**Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.**

**WHAT TO DO IF YOU SMELL GAS:**

- Open a window.
- Do not try to light any appliance.
- Do not touch any electrical switch; do not use any phone in the building.
- Immediately call the gas supplier from a neighbor's phone. Follow gas supplier's instructions.
- If you cannot reach the gas supplier, call the fire department.

**Installation and service must be performed by a qualified professional installer, service agency, or the gas supplier.**

**This appliance is only for use with the type of gas indicated on the rating plate.**

**IMPORTANT: READ THESE INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION OF THE UNIT.**

The Real-Fyre burner system is to be installed only in a solid-fuel burning fireplace with a working flue and constructed of noncombustible material. The installation, including provisions for combustion and ventilation air must conform with the *National Fuel Gas Code, ANSI Z223.1/NFPA 54*, or the *CSA B149.1, Natural Gas and Propane Installation Code*, and applicable local building codes.

A damper clamp is included to maintain the minimum permanent vent opening and to prevent full closure of the damper blade. **The chimney damper MUST be fully opened when burning the unit. The unit is designed to burn with yellow flames; thus adequate ventilation is absolutely necessary.**

To comply with certification, listings, and building code acceptances, and for safe operation and proper performance of this burner system, use ONLY Peterson parts and accessories. Use of other controls, parts, and accessories that are not designed for use with Real-Fyre burner systems is prohibited and will void all warranties, certifications, listings, and building code approvals, and may cause property damage, personal injury, or loss of life.

**\*Note:** Solid-fuels shall not be burned in a fireplace where a decorative appliance is installed.



We recommend that our gas hearth products be installed and serviced by professionals who are certified in the U.S. by the National Fireplace Institute® (NFI) as NFI Gas Specialists.

**INSTALLER:  
Leave this manual with the appliance.  
CONSUMER:  
Retain this manual for future reference.**



**13-085**

# TABLE OF CONTENTS

## GETTING STARTED

IMPORTANT PRE-INSTALLATION AND FIREPLACE SAFETY INFORMATION .....	3
SPECIFICATIONS.....	4
DAMPER CLAMP INSTRUCTIONS.....	5
BURNER REPLACEMENT PARTS LIST.....	6
LOGS PARTS LIST .....	7

## INSTALLATION

INSTALLATION.....	8
<i>BURNER INSTALLATION</i> .....	8
<i>LAVA GRANULES (DECORATIVE)</i> .....	9
<i>SAND GRANULES PLACEMENT</i> .....	9
<i>INITIAL GLOWING EMBERS PLACEMENT</i> .....	9
<i>LOG SET (&amp; ADDITIONAL EMBERS) PLACEMENT</i> .....	10

## USE, CARE, & SERVICE

LIGHTING INSTRUCTIONS .....	14
<i>FOR YOUR SAFETY, READ BEFORE LIGHTING</i> .....	14
<i>TO SHUT OFF GAS TO THE APPLIANCE</i> .....	14
CLEANING AND SERVICING .....	15
<i>TO CLEAN THE BURNER SYSTEM</i> .....	15
FLAME DESCRIPTION .....	15
NOTES PAGE.....	16
TROUBLESHOOTING.....	17
WARRANTY .....	18

## IMPORTANT PRE-INSTALLATION AND FIREPLACE SAFETY INFORMATION

**CAUTION:** Installation and repair must be done by an NFI Certified or other qualified professional installer.

**Installer:** Carefully read these instructions before installing this gas burner system. Be sure you understand all safety precautions and warnings contained in this manual.

- A. It is recommended that adults be present when this gas appliance is operating. It is recommended that this unit is not left burning when unattended or while anyone is sleeping.
- B. This appliance is only for use with the type of gas indicated on the rating plate. This appliance is **NOT FIELD CONVERTIBLE** for use with other gasses.  
CHECK GAS TYPE (natural): The gas supply must be the same as stated on your burner system rating plate. If gas supply is different, **DO NOT INSTALL**. Contact your dealer for immediate assistance.
- C. **BE CAREFUL: If not installed, serviced, and used correctly per these instructions, this product can cause serious personal injury, property damage, or loss of life.**
- D. **WARNING:** Before installing in a solid-fuel-burning fireplace, **the chimney flue, damper, and firebox must be thoroughly CLEANED** of soot, creosote, ashes, and loose paint, and must be inspected by a qualified chimney cleaner. Some older fireplaces may need repair prior to installing this appliance.
- E. Keep the area of the gas burner system clear and free from combustible materials, gasoline, and other flammable vapors and liquids.
- F. **INSUFFICIENT GAS PRESSURE WILL KEEP THE PILOT (IF EQUIPPED) FROM OPERATING PROPERLY. DO NOT USE IF GAS PRESSURE IS LOWER THAN THE MINIMUM REQUIREMENT.**
- G. The minimum inlet gas supply pressure for purposes of input adjustment is **5"** water column (w.c.) on **natural gas**. Insufficient gas pressure will affect proper operation of the pilot (if equipped). Do not install this gas appliance if minimum pressure is not available. The maximum inlet gas supply pressure is 10.5" w.c. on natural gas. (Do not connect this appliance directly to a natural gas tank-this can cause an explosion.)
- H. **The gas piping system must be sized to provide minimum inlet pressure at the maximum flow rate (BTU/hr).** Undue pressure loss will occur if the pipe is too small, or the run is too long. Gas supply pipe must be 1/2" minimum interior diameter. If the gas line is longer than 20', a larger diameter line may be necessary. Refer to the NFPA 54 guidelines for further details.
- I. Input ratings shown in BTU per hour are for elevations up to 2,000 ft. For elevations above 2,000 ft., refer to the National Fuel Gas Code or contact manufacturer before installing this product.
- J. This gas appliance and its main gas valve must be disconnected from the gas-supply piping system during any pressure testing of that system at test pressures in excess of 1/2 psig.
- K. This gas appliance must be isolated from the gas-supply piping system by closing the equipment shutoff valve connected to the gas-supply line during any pressure testing of the gas-supply piping system at test pressures equal to or less than 1/2 psig.
- L. Do not use this appliance if any part has been underwater. Immediately call a qualified service technician to inspect the appliance and to replace any part of the control system and any gas control that has been underwater.
- M. **A fireplace screen must be in place when the system is burning.** Provisions for adequate combustion air must be maintained. Unless other provisions for combustion air are provided, the screen shall have an opening(s) for introduction of combustion air. Combustion air is adequate when all flames curl into the fireplace and away from the screen. **When a glass fireplace enclosure (door) is used, leave the doors fully open when the system is in operation.**
- N. **To install the gas appliance in your fireplace, the fireplace MUST meet the minimum size requirements (see minimum fireplace dimension table in SPECIFICATIONS section).**
- O. This appliance may be installed in an aftermarket, permanently located, manufactured (mobile) home, where not prohibited by local codes. Installation of appliances designed for manufactured home (U.S. only) or mobile home installation must conform with the Standard *CAN/CSA Z240 MH, Mobile Housing*, in Canada, or with the *Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280*, in the United States, or when such a standard is not applicable, *ANSI/NCSBCS A225.1/NFPA 501A, Manufactured Home Installations Standard*.

# SPECIFICATIONS

Real-Fyre gas burner systems must be installed only in a wood burning fireplace with the minimum firebox dimensions and venting requirements met (see table on this page). This appliance is designed to burn with yellow flames; adequate ventilation is absolutely necessary.

Burner Model	Minimum Fireplace Size			BTU Rating	
	Width		Depth	Height	Nat. Gas
	Front	Rear			
G52-18/20	27"	19"	16"	15"	46k
G52-24/30 (24" log set)	33"	25"	16"	15"	55k
G52-24/30 (30" log set)	39"	32"	16"	15"	55k

**Table 1** - Minimum Fireplace Dimensions and BTU ratings

**Note: Rear width is at corresponding depth.**

Minimum permanent free opening area of chimney damper for venting (sq. in.)		
For factory-built fireplaces		
Chimney height	18/20"	24/30"
15'	20	24
20'	17	21
30'	14	16
For masonry-built fireplaces		
15'	30	35
20'	27	32
30'	25	29

**Table 2** - Minimum Chimney Damper Venting Requirements


**Note: The minimum chimney height from hearth to top of chimney is 15'.**

## DAMPER CLAMP INSTRUCTIONS


The damper clamp with hex bolt (Fig. 5-1) is provided as a means to prevent full closure of the damper blade. The clamp is easily attached to most damper blades with pliers or a wrench, and must be permanently installed. The clamp is designed to prevent accidental closure of the damper when installed as illustrated (Fig. 5-2). Should the clamp not fit, or fail to provide the permanent vent opening listed in Table 2, have a permanent stop installed, remove the damper blade, or have the damper cut to provide the minimum permanent opening required.

**Note:** These are minimum damper opening specifications.

**The damper must be completely opened when operating this gas appliance to achieve the best ventilation possible.**

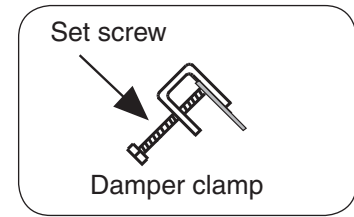

**Fig. 5-1** Damper clamp detail

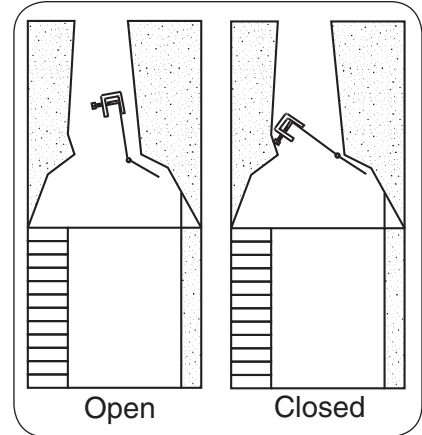


**Fig. 5-2** Damper open / closed

# BURNER REPLACEMENT PARTS LIST





Note: Photos not to scale



24/30" model shown

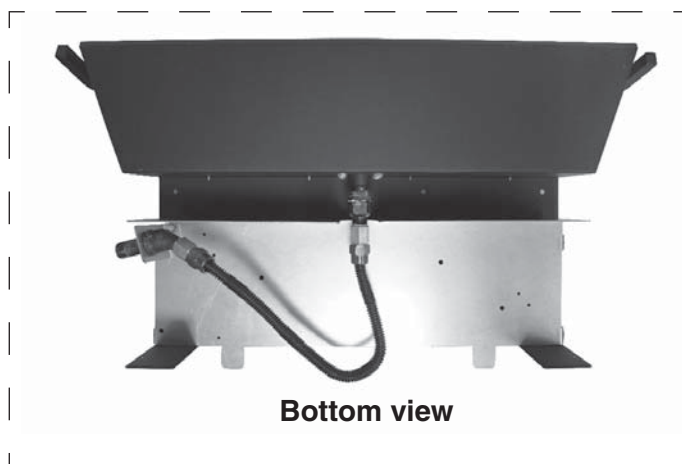

Bottom view

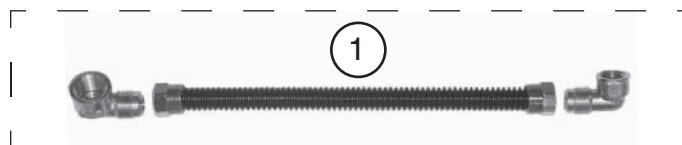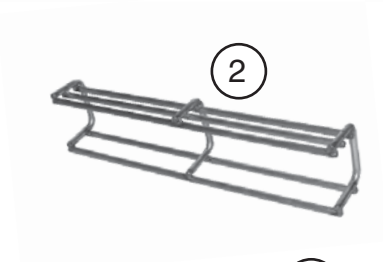

Replacement parts can be ordered from your local Real-Fyre dealer.


Item	Description	18/20" model		24/30" model	
		Part No.	Qty.	Part No.	Qty.
1.	Flex connector (w/ adapters), 1/2" O.D. x 24"	CK-5-24	1	CK-5-24	1
2.	Radiant booster grid	SC-10	1	SC-15	1
3.	Damper clamp	DC-1	1	DC-1	1
4.	Sand granules	CS-10	1	CS-10	1
5.	Lava granules	LF-4	2	LF-4	2
6.	Glowing embers	EM-21	2	EM-21	2
7.	Bryte coals	EM-11	1	EM-11	1

# LOGS PARTS LIST

## ENO-18 Evergreen Oak Log Set

Item	Description	Part No.	Qty.
1.	Rear log	ENOL-16BR	1
2.	Front log (left & right pieces)	ENOL-18BF	1
3.	Left middle log	ENOL-13TL	1
4.	Right middle log	ENOL-12T	1
5.	Center middle log	ENOL-8T	1
6.	Right top log	ENOL-13T	1
7.	Left top log	ENOL-7T	1


**Note:** The log set is packed separately.

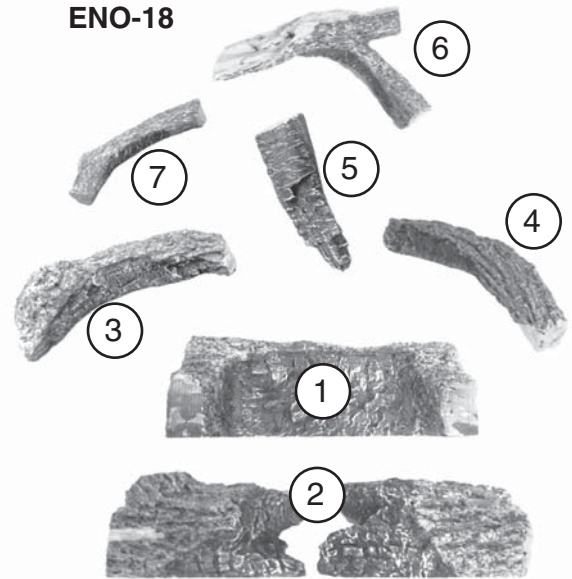

## ENO-24 Evergreen Oak Log Set

Item	Description	Part No.	Qty.
1.	Rear log	ENOL-21BR	1
2.	Front log (left & right pieces)	ENOL-24BF	1
3.	Left middle log	ENOL-15T	1
4.	Right middle log	ENOL-16T	1
5.	Center middle log	ENOL-8T	1
6.	Center top log	ENOL-13T	1
7.	Left top log	ENOL-9T	1


**Note:** The log set is packed separately.

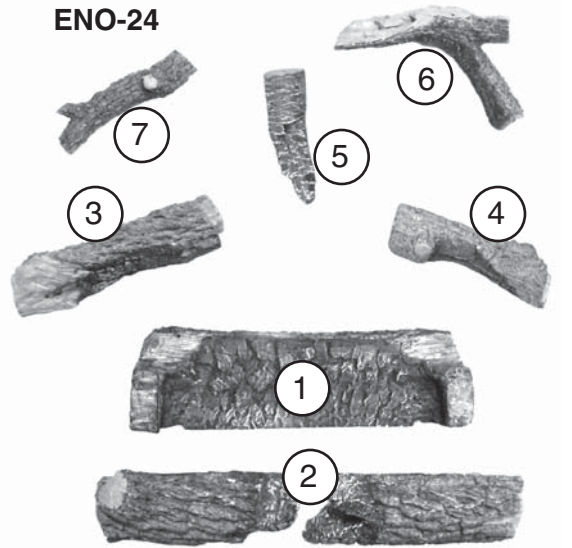

## ENO-30 Evergreen Oak Log Set

Item	Description	Part No.	Qty.
1.	Rear log	ENOL-23BR	1
2.	Front log (left & right pieces)	ENOL-30BF	1
3.	Left middle log	ENOL-15T	1
4.	Right middle log	ENOL-16T	1
5.	Center middle log	ENOL-8T	1
6.	Left top log	ENOL-9T	1
7.	Right top log	ENOL-10T	1
8.	Center top log	ENOL-13T	1

**Note:** The log set is packed separately.

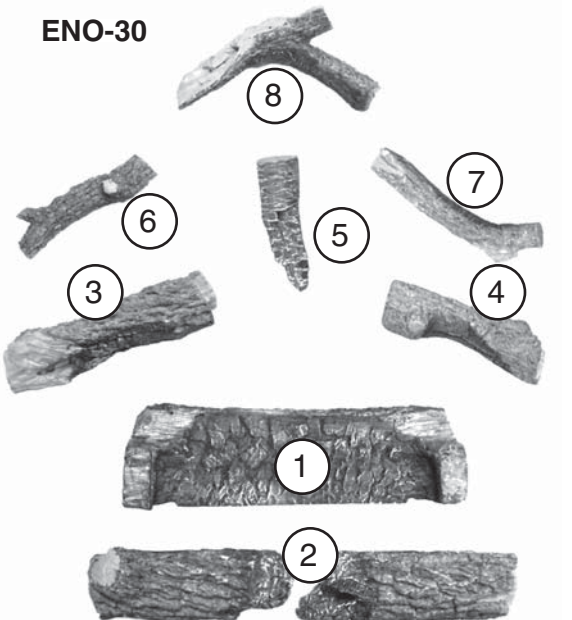

# INSTALLATION

The Real-Fyre burner system must be installed by a qualified professional service technician. Instructions must be followed carefully to ensure proper performance and full benefit from the burner system. **Check to be sure the burner system is designed and labeled for the type of gas (natural gas only) supplied to the fireplace. Fireplace floor must be level, clean, and smooth.**

**WARNING:** Failure to position the parts in accordance with these diagrams or failure to use only parts specifically approved with this appliance may result in property damage or personal injury.

The following section addresses the installation of the burner model directly to the gas supply.

**IF THE BURNER IS TO BE INSTALLED WITH A PILOT KIT: FOLLOW THE INSTRUCTIONS SUPPLIED WITH THE PILOT KIT FOR SPECIFIC BURNER INSTALLATION INSTRUCTIONS.**

REFER TO THE BURNER PARTS LIST WHEN FOLLOWING THESE INSTRUCTIONS.

24" burner shown here.

## BURNER INSTALLATION

1. MAKE SURE THE FIREPLACE GAS SUPPLY IS TURNED OFF.
2. Locate the gas-supply stub inside the fireplace and remove the cap, if attached (reference Fig. 8-2).

**CAUTION:** When removing the cap, make sure the stub does not turn, loosening the connection inside the wall.

3. Remove the small adapter that is loosely connected to the flex connector (included). Attach the adapter to the nipple found on the bottom of the burner pan using a pipe compound resistant to all gasses. Tighten securely. Then attach the flex connector to the adapter. Tighten securely (See Fig. 8-1).
4. Place the burner system in the fireplace. Center the burner in the fireplace. (Reference Fig. 8-3 for orientation.)
5. **Be sure gas to the fireplace is off.** Remove the large adapter that is loosely connected to the flex connector. Attach the adapter to the gas-supply stub using a pipe compound resistant to all gasses. Tighten securely. Then attach the flex connector to the adapter. Tighten securely (See Fig. 8-2).
6. **LEAKTEST:** Use a long-necked butane lighter, or lay a lighted match next to the burner pipe, and carefully turn on the gas supply until the burner ignites. Test at all connections for leaks using the appropriate soapy water solution. If bubbles appear, a leak is present. Turn off the gas and tighten at all connections. Repeat until no leaks are present. If a leak persists, turn off the gas supply and contact the local gas company or dealer. **NEVER USE A FLAME TO CHECK FOR LEAKS.**

Turn off the gas supply prior to proceeding.

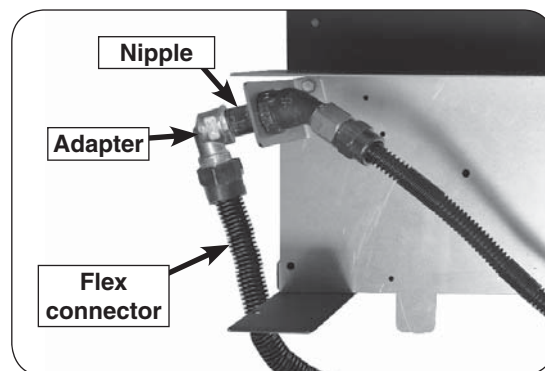


Fig. 8-1 Connect flex to burner

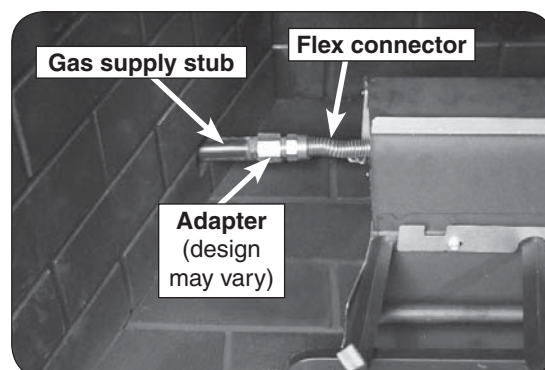


Fig. 8-2 Connect flex to gas supply

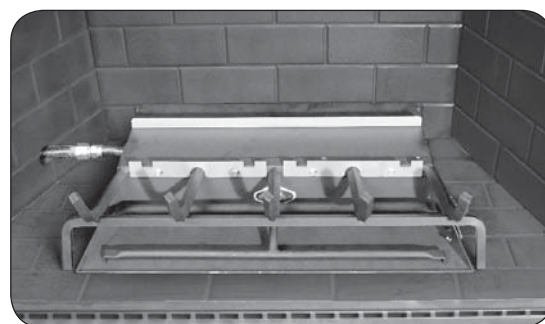


Fig. 8-3 Orientation



## LAVA GRANULES (DECORATIVE)

1. Spread the supplied lava granules on the floor of the fireplace, around the front and sides of the burner system (see Fig. 9-1).

**Note:** DO NOT place any lava media on the burner system, or behind it.

## SAND GRANULES PLACEMENT

The sand granules supplied with the unit are specially selected for use with natural gas. They maximize flame distribution and reduce carbon buildup.

**CAUTION:** Use only the sand provided for this natural gas burner.

1. Fill the burner pan completely with the granules (see Fig. 9-2). **Avoid spilling the granules on the pilot assembly (if equipped).**
2. Slope the granules at the same angle as the burner pan. This is important to ensure quiet lighting and even flame distribution.

**Note:** The granules should be approximately 1/2" below the fingers of the burner grate (see Fig. 9-3). DO NOT pour the granules to a level where they are touching the grate.


## INITIAL GLOWING EMBERS PLACEMENT

**Important:** The supplied embers are to be applied at several stages of installation. You may end up with some unused embers at the end of installation. If so, they may be used as instructed in the note found at the end of log set placement.

Sprinkle a portion of the glowing embers lightly and evenly over the entire surface of the sand granules as shown in Fig. 9-4. **Break up any clumps that may have developed during shipment.**

**Note:** Place the embers lightly over the areas in between the grate fingers.


**Note:** The remainder of the glowing embers will be placed as the logs are placed.

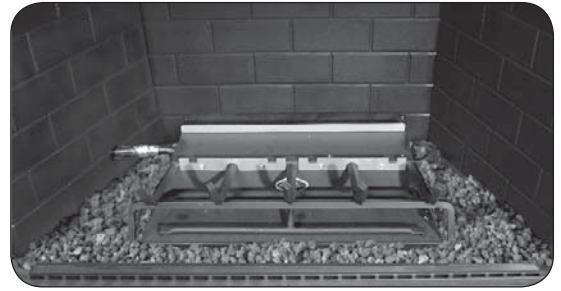


**Fig. 9-1** Place lava media



**Fig. 9-2** Place sand granules

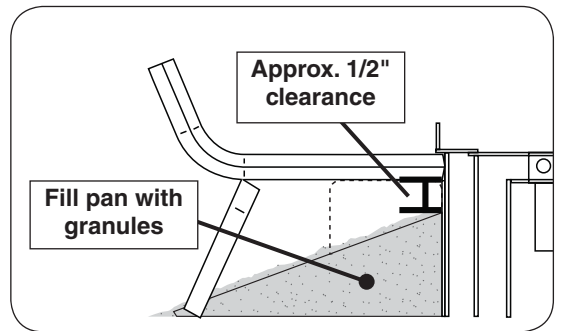

**Fig. 9-3** Sand granules detail

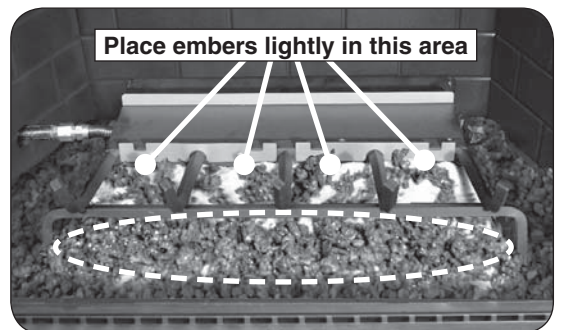

**Fig. 9-4** Place initial glowing embers


## LOG SET (& ADDITIONAL EMBERS) PLACEMENT

You must position and maintain the log layout as shown here to ensure optimal operation of the burner system. 24" log set shown below for generic placement steps. Final steps are separated by log set size.


**CAUTION: BURN HAZARD! Logs will remain hot for some time after use. If you need to reposition any log to maintain the proper layout, use heat-resistant gloves or allow logs adequate time to cool before handling.**

### Generic Placement Steps


All models begin with the log and ember placement shown below. Continue with the appropriate section (on one of the following pages) specific to your log set size.

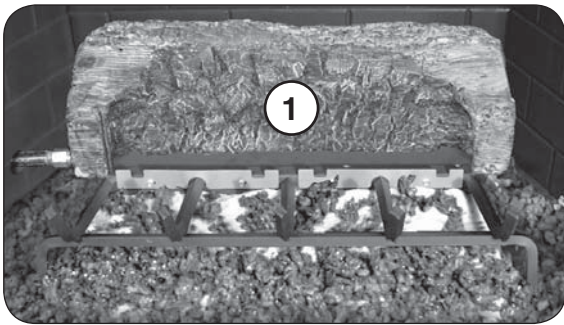


Place the rear log (log #1) as shown. The log should be slid back on the burner until it hits the backstop.

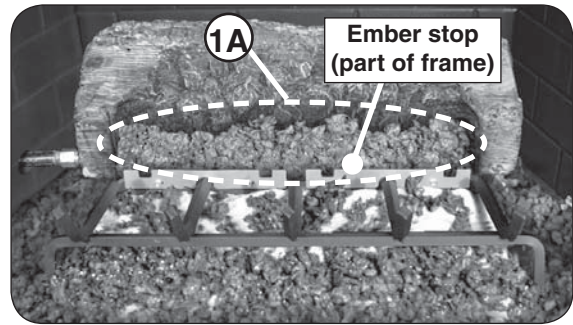


Place a level amount of embers in the area in front of the rear log as shown. The ember stop serves to confine the embers in place. (Save some embers for later use.)

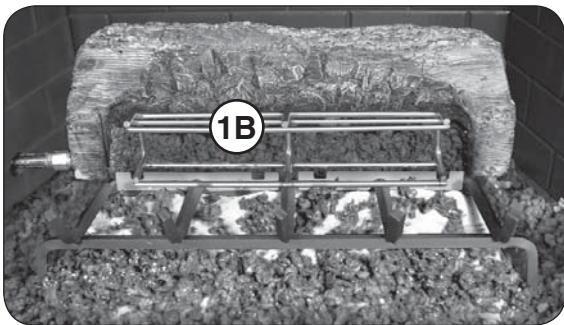

Place the radiant booster grid as shown. The grid should be slid back on the burner up against the rear log. The ember stop has notches to properly align the grid in place.

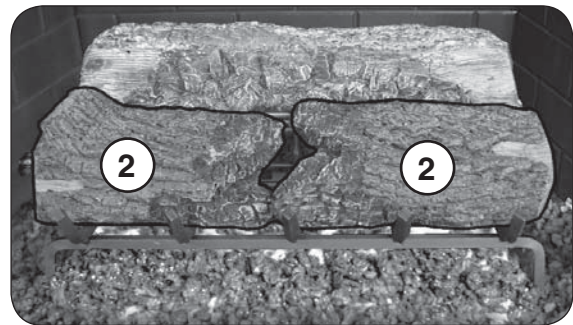

Place the left and right front log pieces (log #2) as shown. The two logs should be touching and centered on the burner.

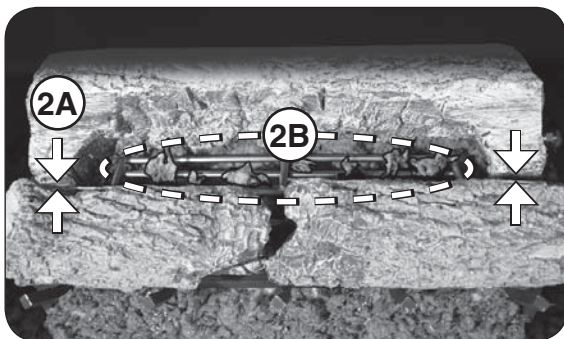


Gently compress the rear and front logs to create a tight fit around the grid. The rear and front logs will almost touch. Then place a few more embers across the grid as shown.

## INSTALLATION (cont.)


### 18" Log Sets Only

For 18" log sets, continue with the steps below to complete placement.


For 24" or 30" log sets, proceed to the following pages.

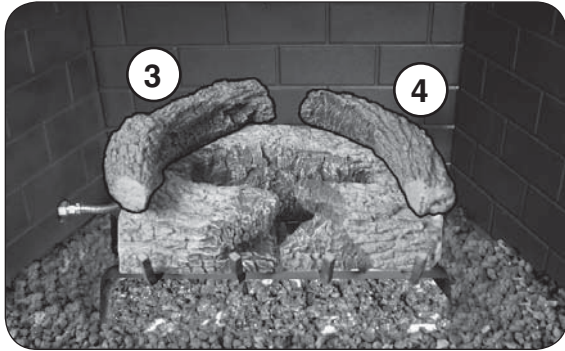

Place the left and right middle logs (logs #3 & #4) as shown.

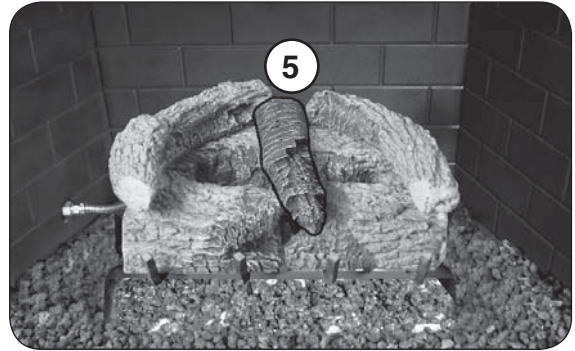

Place the center middle log (log #5) as shown.

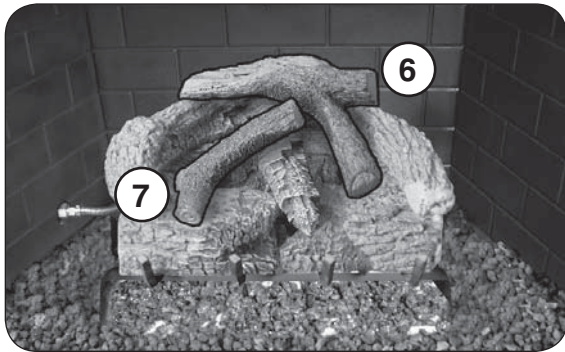

Place the left and right top logs (logs #6 & #7) as shown.



Separate the bryte coals into small pieces and evenly place them over the glowing embers in the area shown.


**Note:** The conditions/environment of each setup will slightly vary. After installation of your unit is complete, follow the LIGHTING INSTRUCTIONS section to light the burner, and allow it to burn for 20 minutes. At that point, if adjustment is desired, shut the unit down and add additional glowing embers between the front logs and on the radiant grid booster. The existing embers may also be gently adjusted with a long screwdriver. Light the burner, observe, and repeat this process until the desired flame pattern is achieved.

## INSTALLATION (cont.)


### 24" Log Sets Only

For 24" log sets, continue with the steps below to complete placement.


For 18" log sets, go back to the previous page. For 30" log sets, proceed to the following page.

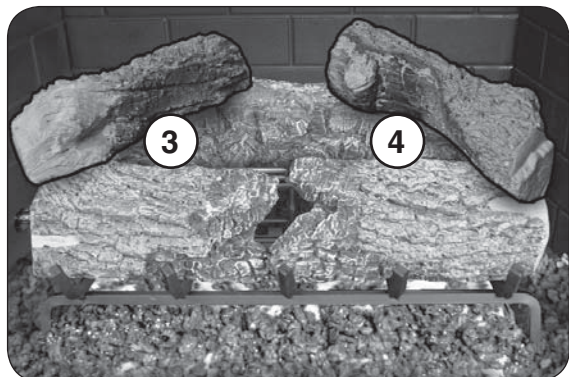


Place the left and right middle logs (logs #3 & #4) as shown.

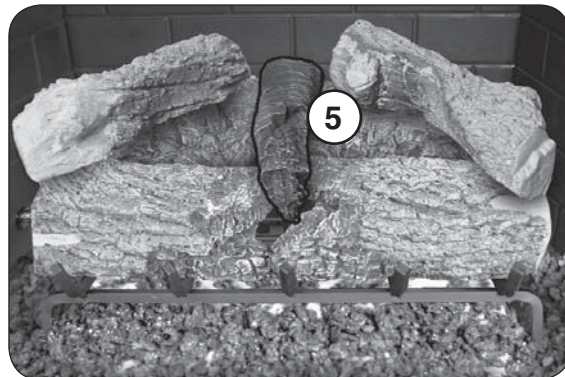

Place the center middle log (log #5) as shown.

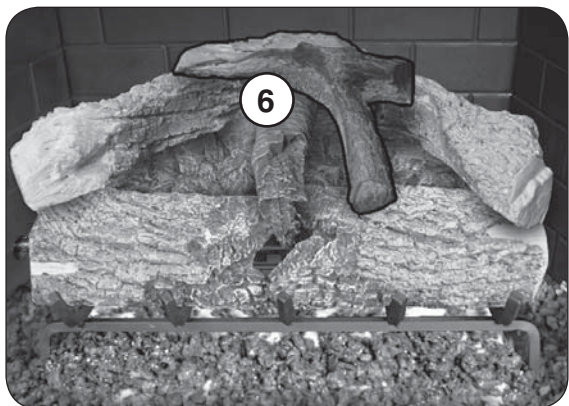

Place the center top log (log #6) as shown.

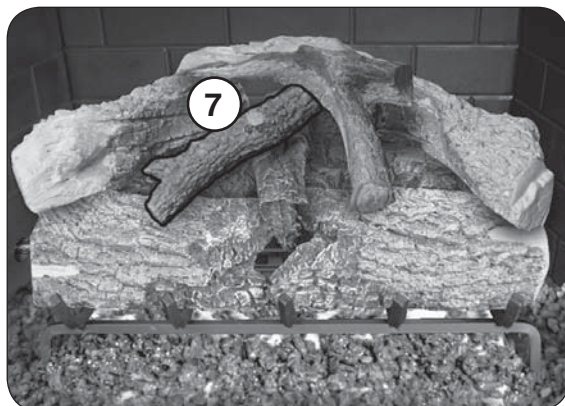

Place the left top log (log #7) as shown.



Separate the bryte coals into small pieces and evenly place them over the glowing embers in the area shown.


**Note:** The conditions/environment of each setup will slightly vary. After installation of your unit is complete, follow the LIGHTING INSTRUCTIONS section to light the burner, and allow it to burn for 20 minutes. At that point, if adjustment is desired, shut the unit down and add additional glowing embers between the front logs and on the radiant grid booster. The existing embers may also be gently adjusted with a long screwdriver. Light the burner, observe, and repeat this process until the desired flame pattern is achieved.

## INSTALLATION (cont.)


### 30" Log Sets Only

For 30" log sets, continue with the steps below to complete placement.


For 18" or 24" log sets, go back to the previous pages.

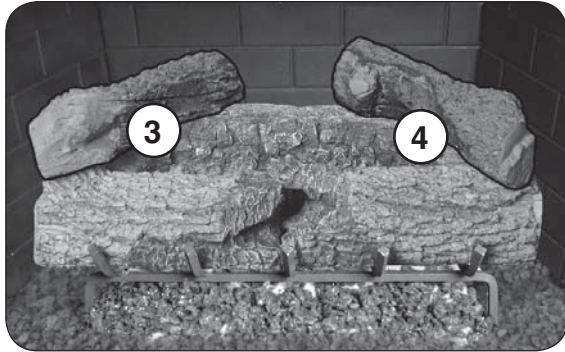


Place the left and right middle logs (logs #3 & #4) as shown.

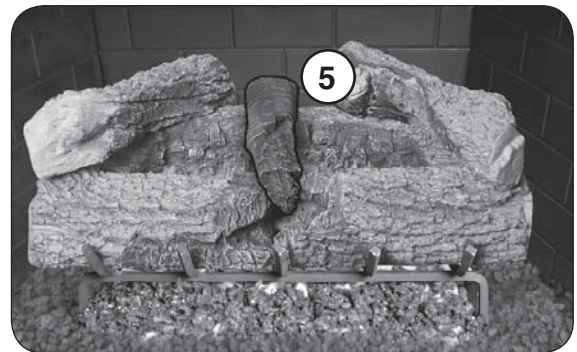

Place the center middle log (log #5) as shown.

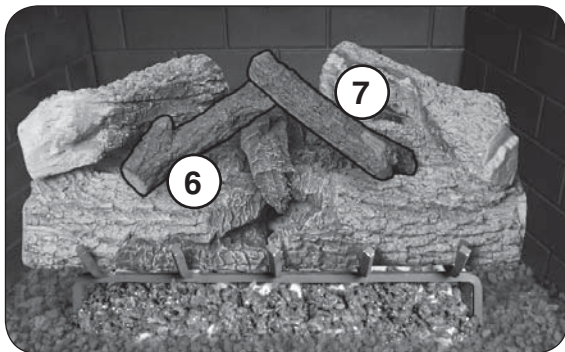

Place the left and right top logs (logs #6 & #7) as shown.

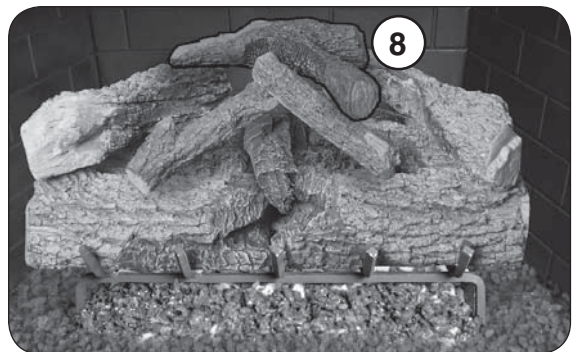

Place the center top log (log #8) shown.



Separate the bryte coals into small pieces and evenly place them over the glowing embers in the area shown.

**Note:** The conditions/environment of each setup will slightly vary. After installation of your unit is complete, follow the LIGHTING INSTRUCTIONS section to light the burner, and allow it to burn for 20 minutes. At that point, if adjustment is desired, shut the unit down and add additional glowing embers between the front logs and on the radiant grid booster. The existing embers may also be gently adjusted with a long screwdriver. Light the burner, observe, and repeat this process until the desired flame pattern is achieved.

# LIGHTING INSTRUCTIONS

## FOR YOUR SAFETY, READ BEFORE LIGHTING

**WARNING: IF YOU DO NOT FOLLOW THESE INSTRUCTIONS EXACTLY, A FIRE OR EXPLOSION MAY RESULT, CAUSING PROPERTY DAMAGE, PERSONAL INJURY, OR LOSS OF LIFE.**

- A. BEFORE LIGHTING**, smell all around the unit area for gas. Be sure to smell next to the floor, because some gas is heavier than air and will settle on the floor.
- B. WHAT TO DO IF YOU SMELL GAS**
1. Shut off the gas to the appliance.
  2. Extinguish any open flame.
  3. If odor continues, immediately call your gas supplier or the fire department.
- C.** Use only a proper key to turn the gas line valve. Never use tools. If the valve will not turn, **DO NOT** try to repair it. Call a qualified professional service technician. Force or attempted repair may result in fire or explosion.

**If your burner is operated by a pilot kit, carefully follow the lighting instructions supplied with your pilot kit.**

1. **STOP!** Read the safety information above.
2. Ensure the key valve is completely in the **OFF** position before beginning lighting sequence.
3. Lay a lighted long-stem match on the center of the top burner (**do not hold the match in your hand**) or use a lighted long-necked butane lighter (Fig. 14-1).
4. **Once the match is burning and in position**, slowly turn the key valve counter-clockwise toward the **ON** position until it no longer rotates (see Fig. 14-2). Your burner should light.


**CAUTION:** If the burner does not light before the match goes out, immediately turn the key valve clockwise toward the **OFF** position until it no longer rotates.

Wait approximately five (5) minutes to clear out any gas, and repeat steps 1-4 above.


**If your burner fails to light again, turn the key valve clockwise toward the OFF position until it no longer rotates and contact your dealer or gas supplier.**

### TO SHUT OFF GAS TO THE APPLIANCE

**To extinguish your gas burner**, insert the key into the key valve and turn the valve clockwise toward the **OFF** position until it no longer rotates (see Fig. 14-2). Be sure the control knob is turned fully off to avoid any gas leakage.

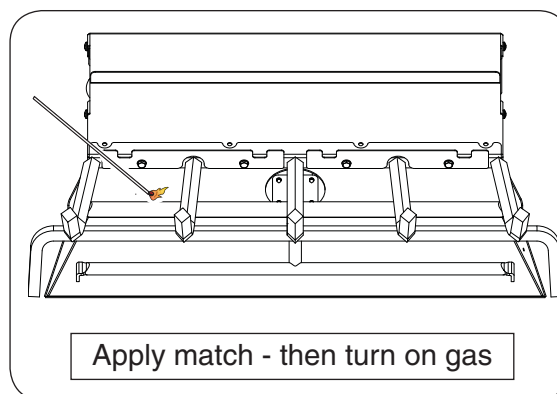

**Fig. 14-1**

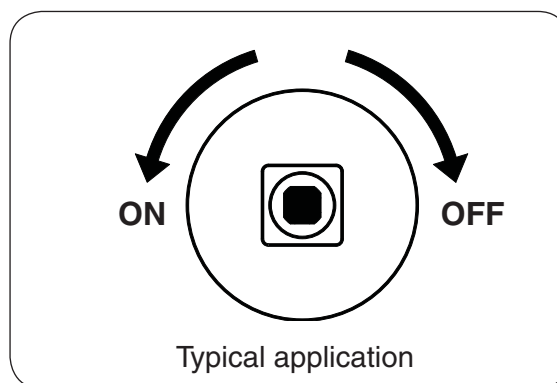

**Fig. 14-2**

## CLEANING AND SERVICING

**Note:** Regular cleaning and servicing will be necessary to ensure proper operation and burn characteristics.

Always shut off the gas to the appliance while performing service work.

Allow the appliance to cool before servicing.

**Installation, service, and repair must be done by an NFI Certified or other qualified professional service technician. The appliance MUST be inspected before use, and cleaned at least annually to prevent burner shutdown, sooting, odors, etc. It must be checked for clean burning operation with the correct tools to service this unit. More frequent cleaning may be required.** It is imperative that all components and compartments, burner(s), and circulating air passageways of the appliance be kept clean and free of all obstructions (as applicable).

In addition, a periodic examination and cleaning of the solid-fuel-burning fireplace venting system should be conducted by a qualified professional service technician.


**Any safety screen or guard removed for servicing must be replaced prior to operating this appliance.**

Verify proper operation after servicing.

### TO CLEAN THE BURNER SYSTEM

1. Remove the log set, grid, all embers, and sand. Use a vacuum cleaner to remove loose particles from all surfaces of the burner log set. Do not use cleaning fluids.
2. Dust the grate, the grid, the assembly, and the burners. Using a compressed air duster (commonly available at computer, electronic, or office supply stores); blow through all of the burner ports (and pilot assembly area if equipped).
3. Reinstall the sand, embers, grid and log set as instructed in this manual.

If, after a period of use, the flames start to exhibit unusual shapes and behavior, or the burners fail to ignite smoothly, the burner ports may require some cleaning. If this happens, it is preferable to contact the nearest dealer to get the appliance serviced.

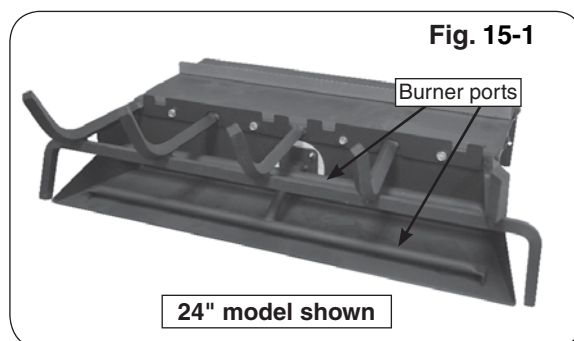

**Do not remove the rating plates or the warning tags. These are an integral safety and identification component of this appliance.**

**We recommend following these instructions at the beginning of each fireplace season and as needed throughout the year, depending on your usage pattern and the environmental conditions in your home.**

## FLAME DESCRIPTION

Observe the flames. The main burner flames should be blue at the base and a combination of blue/yellow at the body and at the tips. They should be approximately 5-8" above the logs, with the center flame being the tallest. The ember flames should be 1/4" to 5" above the embers. (See 15-2 for example.)



**Fig. 15-2** Flame appearance

Please use this page to record any information that you may want to have at hand.



## TROUBLESHOOTING

POSSIBLE CAUSE	SOLUTIONS
----------------	-----------

### 1 BURNER SHUTTING DOWN DURING OPERATION

A. Insufficient or excessive gas pressure	<p><b>A1.</b> Check gas pressure (Read G.- I. of IMPORTANT PRE-INSTALLATION AND FIREPLACE SAFETY INFORMATION section, &amp; check with local gas company).</p> <p><b>A2.</b> Other gas appliances may be on the same gas line, dropping gas pressure to burner system. Check pressures with everything operating to ensure adequate pressure.</p>
B. Log placement	<b>B.</b> Reference the LOG PLACEMENT section in this manual for recommended log positioning.
C. Flue area, fireplace, or damper dirty from soot	<b>C.</b> Clean around, above, and under damper thoroughly. Clean fireplace, removing loose material, including soot and creosote.
D. Fireplace too small for unit	<b>D.</b> Ensure minimum requirements are met. (See FIREPLACE SIZE REQUIREMENT section in this owner's manual.)
E. Blockages on burner	<b>E.</b> Vacuum any lava granules or material that may have fallen onto burner pipe area.

### 2 LOW FLAME HEIGHT

A. Gas pressure	<b>A.</b> Check gas pressure (see Section 1, A1 of this table).
-----------------	---

### 3 BURNER NOT BURNING EVENLY

A. Burner orifice clogged	<b>A.</b> Clean burner orifice.
B. Top burner lights; bottom burner has delayed ignition.	<b>B1.</b> Check gas pressure. Can be caused by too small of a gas line (see Section 1, A1 of this table).

### 4 ODORS

A. Gas leak	<b>A.</b> Shut off gas, if possible. Follow instructions on front page. Have a qualified professional service technician or the gas company correct all leaks.
B. New home, new carpet, or new paint	<b>B.</b> When these odors are drawn into the fireplace, this may cause objectionable odors. Thoroughly ventilate the area before restarting your burner system.

### 5 SOOTING

A. On logs, in firebox, or room	<b>A.</b> Check gas pressure (see Section 1, A1 of this table).
B. Drafts in room	<b>B.</b> Eliminate drafts by closing heating and air conditioning vents, returns, and outside air vents. Fans blowing directly into fireplace should be turned off when set is operating.
C. Air shutters blocked (if applicable)	<b>C.</b> Air shutters are blocked with debris. Vacuum debris away from air shutter.
D. Log placement	<b>D.</b> See solution in troubleshooting 1B.
E. Using natural-gas burner on propane gas	<b>E.</b> If the gas listed on the nameplate does not match the gas you are burning, shut down the burner system immediately. Then call your dealer.
F. Adding any accessories to log sets	<b>F.</b> Shut down log set and take off any logs or accessories that do not belong with the set.

# WARRANTY

## PETERSON VENTED DECORATIVE GAS APPLIANCE LIMITED WARRANTY

Robert H. Peterson Co. ("RHP") warrants your Real Fyre® vented decorative gas appliance to be free from defects in material and workmanship.

Peterson vented ceramic refractory gas logs are warranted for **as long as you own them (lifetime)**.

Peterson vented burner assemblies are **WARRANTED for TEN (10) YEARS**. Peterson vented outdoor stainless-steel burner assemblies are warranted for **FIVE (5) YEARS**.

Peterson glass, gems, nuggets, and fiber-ceramic blend gas logs are warranted for **FIVE (5) YEARS**.

SPK-26 controls are warranted for **THREE (3) YEARS**.

APK-17 controls (including -17 valve) are warranted for **TWO (2) YEARS**.

All other Peterson valves, pilots, and controls are warranted for **ONE (1) YEAR (excluding batteries)**.

### A COPY OF YOUR SALES SLIP FOR PROOF OF PURCHASE IS REQUIRED

This warranty applies to the original purchaser for products which are installed in the United States or Canada and which are operated and maintained as intended for single family residential usage. This warranty is valid only with proof of purchase, shall commence on the date of purchase, and shall terminate (both as to original and any replacement products) on the anniversary date of the original purchase of the product stated on the above schedules.

This warranty covers defects in material and workmanship. This warranty **does not** cover parts which become defective as a result of negligence, misuse, use not in compliance with the Owner's Manual/Installation Instructions, accidental damage, improper handling, improper storage, improper installation, lack of required routine maintenance (as specified in the Owner's Manual/Installation Instructions), electrical damage, local gas impurities or failure to protect against combustibles. Product must be installed (and gas must be connected) as specified in the Owner's Manual/Installation Instructions by a **qualified professional installer**. Modifications to products which are not specifically authorized will void this warranty. Accessories, parts, valves, remotes, etc. when used must be Peterson products or this warranty is void. Warrantied items will be repaired or replaced at Peterson's sole discretion. This warranty **does not** apply to rust, corrosion, oxidation, or discoloration unless the affected part becomes inoperable.

This warranty **does not** cover labor or labor related charges, except as provided by separate specific written programs from the Peterson Co. All repair work must be performed by a qualified professional service person and requires prior approval of Peterson.

Peterson may require the defective product or part to be returned to the factory to determine the cause of failure. Peterson will pay freight charges if the product or part is determined to be defective. This warranty does not cover breakage in shipment from our (Independent) distributor to its customer if the damage is determined to have occurred during that shipment.

This warranty specifically excludes liability for **indirect, incidental**, or consequential damages. Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusion may not apply to you. This warranty gives you specified legal rights, and you may have other rights that vary from state to state or province.

For additional information regarding this warranty, or to place a warranty claim, contact the R. H. Peterson dealer where the product was purchased.

**TO REGISTER YOUR PRODUCT ONLINE GO TO: WWW.RHPETERSON.COM,  
AND CLICK ON PRODUCT REGISTRATION. THANK YOU FOR YOUR PURCHASE.**

<b>Quality Check</b>			<b>Date:</b> _____		
<b>Burner Orifices</b>	<b>Nat.</b>	<b>L.P.</b>	<b>Leak Test:</b> _____	<b>Model#:</b>	_____
<b>Main:</b>	_____	_____	<b>Burn Test:</b> _____	<b>Serial#:</b>	_____
<b>Other:</b>	_____	_____	<b>Gas Type:</b> <u>Nat. / L.P.</u>	<b>Air Shutter:</b>	_____
				<b>Inspector:</b>	_____